

Conbextra HF

Shrinkage Compensated Cementitious Precision Grout

Uses

Conbextra HF is used for free flow precision grouting in a wide range of applications. These critical uses include heavy duty support beneath machine base plates, bridge bearings and crane rails.

Advantages

- Unique non-metallic dual expansion system compensates for shrinkage in both the plastic and hardened states.
- Excellent initial flow and flow retention.
- High early strength facilitates rapid installation and early operation of plant.
- High ultimate strength and low permeability ensure durability of the hardened grout.
- Hydrogen-free gaseous expansion.
- Chloride free.
- Suitable for pumping or pouring over a large range of application consistencies and temperatures.

Standards Compliance

Conbextra HF conforms fully to U.S. Corps of Engineers Specification for non-shrink grout CRD-C621-82A and ASTM C1107-91 (Type C).

When Conbextra HF is specified for use at nuclear sites, it is manufactured and tested in accordance with the AWSI/ASME N45 "Quality Assurance Program Requirements for Nuclear Facilities".

Conbextra HF is suitable for use in contact with potable water. "Water By-laws Scheme - approved product" (Listing no. 9106502).

Description

Conbextra HF shrinkage compensated cementitious precision grout is supplied as a ready to use dry powder. The addition of a controlled amount of clean water produces a free-flowing precision grout for gap thicknesses up to 125 mm. In addition the low water requirement ensures high early strength and long term

durability.

Conbextra HF is a blend of Portland cements, graded fillers and chemical additives which impart controlled expansion in both the plastic and hardened states. The filler grading minimises segregation and bleeding over a wide range of application consistencies

Technical Support

Fosroc offers a comprehensive range of high quality, high performance construction products. In addition, Fosroc offers a worldwide technical support and on-site service to specifiers, end-users and contractors.

Properties

The following results were obtained at a water : powder ratio of 0.22 and a temperature of 20°C.

Test Method	Typical Result
Compressive Strength (BS 1881:part 116 1983)	25 N/mm ² at 1 day
	44 N/mm ² at 7 days
	56 N/mm ² at 14 days
	64 N/mm ² at 28 days
	82 N/mm ² at 180 days
Flexural Strength (BS4551 – 1980)	5.0 N/mm ² at 1 day
	8.0 N/mm ² at 7 days
	10.0 N/mm ² at 28 days
	11.0 N/mm ² at 180 days
Setting Time (BS 4550 Part 3 - 1978)	Initial set: 5.5 hrs
	Final set: 7.5 hrs
	Time for Expansion
Plastic State	Start 15 mins
Hardened State	Finish Initial set
	Start Initial set
	Finish up to 28 days
Fresh Wet Density	Approx 2,200 kg/m ³ Depending on actual consistency used
Young's Modulus (ASTM C-469-83)	>24,500 MPa

Conbextra HF

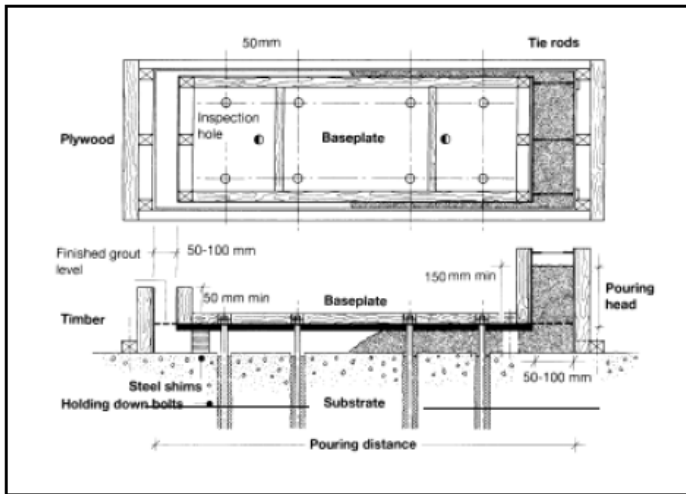


Figure 1: Typical specification drawing

Holding down bolts

Non-removable: Re-bar bolt

(with/without extended thread length and sleeve).

Removable: Loksleeve bolt with stud - fully sleeved.

Removable: Loksleeve bolt with hexagon head, bolt, fully sleeved.

Shuttering

Timber: All timber to be 50 x 75 mm. Bolted to the substrate or fixed to baseplate where appropriate.

Plywood: All plywood to be 20 mm thick.

Levelling devices

Steel shims, elastic stools, double nuts. See note on alternative levelling devices in this data sheet.

For pouring head and pouring distances see table in this data sheet.

*Drawing not to scale

Expansion Characteristics

An expansion of up to 1% when measured according to ASTM C 827 overcomes plastic settlement in the unset material.

Longer term expansion in the hardened state is designed to comply with the requirements of ASTM C 1107-91 to compensate for drying shrinkage.

Specification Clauses

Performance Specification

All precision grouting (specify details and areas of application) must be carried out with a pre-packaged cement based product, which is non-metallic and chloride-free. It shall be mixed with clean water to the required consistency and not exhibit bleed or segregation. A volumetric expansion of up to 2% shall occur while the grout is in a plastic state by means of a gaseous, hydrogen-free system. The grout must also be compensated for shrinkage in the hardened state. The compressive strength of the grout must exceed 50 N/mm² at 7 days and at 65 N/mm² 28 days.

The grout shall fully conform to the requirements of US Army Corps of Engineers Specification for non-shrink grout CRDC621-82A or ASTM C 1107-91.

The storage, handling and placement of the grout must be in strict accordance with the manufacturer's instructions.

Supplier specification

All precision grouting (specify details and areas of application) must be carried out using Conbextra HF manufactured by Fosroc and used in accordance with the manufacturer's data sheet.

Application instructions

Preparation

Foundation surface

The substrate surface must be free from oil, grease or any loosely adherent material. If the concrete surface is defective or has laitance, it must be cut back to a sound base. Bolt holes or fixing pockets must be blown clean of any dirt or debris.

Pre-soaking

For a minimum of 2 hours prior to grouting, the area of cleaned foundation should be flooded with fresh water. Immediately before grouting takes place, any free water should be removed. Particular care should be taken to blow out all bolt holes and pockets.

Base plate

It is essential that this is clean and free from oil, grease or scale. Air pressure relief holes should be provided to allow venting of any isolated high spots.

Levelling shims

If these are to be removed after the grout has hardened, they should be treated with a thin layer of grease.

Conbextra HF

Formwork

The formwork should be constructed to be leakproof as Conbextra HF is a free flowing grout. This can be achieved by using foam rubber strip or mastic sealant beneath the constructed formwork and between joints. In some cases it is practical to use a sacrificial semi-dry sand and cement formwork. The formwork should include outlets for the pre-soaking water.

The unrestrained surface area of the grout must be kept to a minimum. Generally the gap width between the perimeter formwork and the plate edge should not exceed 150 mm on the pouring side and 50 mm on the opposite side. There should be no gap at the flank sides.

Mixing

For best results a mechanically powered grout mixer should be used. For quantities up to 50 kg a slow speed drill fitted with a high shear paddle is suitable. Larger quantities will require a high shear vane mixer. Do not use a colloidal impeller mixer. It is essential that machine mixing capacity and labour availability is adequate to enable the grouting operation to be carried out continuously. This may require the use of a holding tank with provision for gentle agitation to maintain fluidity. The selected water content should be accurately measured into the mixer. Slowly add the total contents of the Conbextra HF bag, mix continuously for 5 minutes, ensuring a smooth, even consistency is obtained.

Consistency of mixed grout

To achieve the consistencies which are defined in CRD-C621-82A, the amount of clean water that is added to a 25 kg bag at 20°C is:

Flowable	4.5 litres
Fluid	4.8 litres

Max. flow distance in mm @ 20°C

Grout consistency	Gap depth mm	100mm head	250mm head
Flowable:	10	360	1200
	20	950	2600
	30	1500	3000
	40	2200	3000 +
	50	3000	3000 +
Fluid:	10	900	2500
	20	1900	3000
	30	3000	3000 +
	40	3000 +	3000 +

Placing

Place the grout within 15 minutes of mixing to gain the full benefit of the expansion process. Conbextra HF can be placed in thicknesses up to 125 mm in a single pour. Any bolt pockets must be grouted prior to grouting between the substrate and the base plate. Continuous grout flow is essential.

Sufficient grout must be available prior to starting and the time taken to pour a batch must be regulated to the time taken to prepare the next one.

The mixed grout should be poured only from one side of the void to eliminate the entrapment of air or surplus presoaking water. This is best achieved by pouring the grout across the shortest distance of travel. The grout head must be maintained at all times so that a continuous grout front is achieved. Where large volumes have to be placed Conbextra HF may be pumped. A heavy duty diaphragm pump is recommended for this purpose. Screw feed and piston pumps may also be suitable.

Curing


On completion of the grouting operation, exposed areas should be thoroughly cured. This should be done by the use of Concure curing membrane, continuous application of water and / or wet hessian.

Cleaning

Conbextra HF should be removed from tools and equipment with clean water immediately after use. Cured material can be removed mechanically, or with Fosroc Acid Etch.

Conbextra HF

Figure 1 – Typical Hopper System

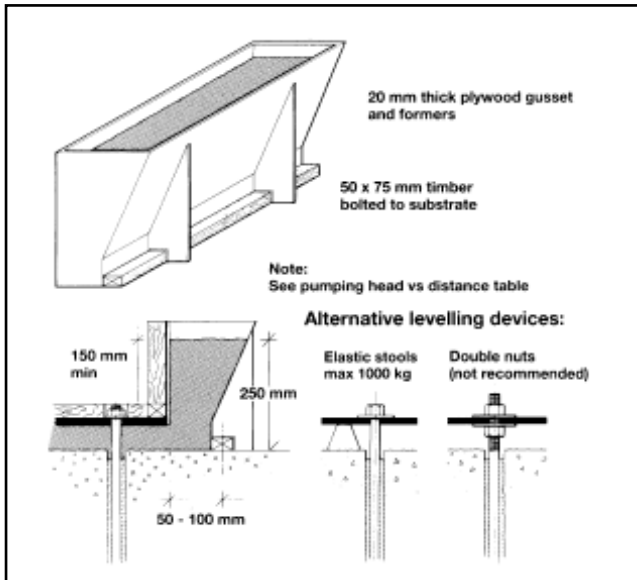

Removable hopper: For larger pours the grout may be hand placed or pumped into a removable hopper (trough).

Limitations

High temperature working

At ambient temperatures above 35⁰C the mixed grout should be stored in the shade. Cool water (below 20⁰C) should be used for mixing the grout.

Supply

Conbextra HF is supplied in 25 kg moisture resistant bags.

Yield

Allowance should be made for wastage when estimating quantities required. The approximate yield per 25 kg bag for different consistencies is:

Consistency	Flowable	Fluid
Yield (litres)	13.25	13.50

Storage

Conbextra HF has a shelf life of 12 months if kept in a dry store in sealed bags. If stored in high temperature and high humidity locations the shelf life may be reduced.

Precautions

Health and safety

Conbextra HF is alkaline and should not come into contact with skin and eyes. Avoid inhalation of dust during mixing.



Fosroc Sdn. Bhd.

No 8 Jalan Trompet, 33/8
Seksyen 33, 40400 Shah Alam
Selangor, Malaysia.

Branch Office:

29, Jalan Zainal Abidin,
10400 Penang, Malaysia.

www.fosroc.com

Important note

Fosroc products are guaranteed against defective materials and manufacture and are sold subject to its standard Conditions for the Supply of Goods and Services, copies of which may be obtained on request. Whilst Fosroc endeavours to ensure that any advice, recommendation, specification of information it may give is accurate and correct, it cannot, because it has no direct or continuous control over where or how its products are applied, accept any liability either directly or indirectly arising from the use of its products, whether or not in accordance with any advice, specification, recommendation of information given by it.

telephone:
+60 3 5191 5660

fax:
+60 3 5191 6960

email:
enquiry@malaysia.fosroc.com

+60 4 2287 464

+60 4 2292 661

